CRL DEAD BOLT HANDLE

Quote/Order Form (130, 131, 132, 140, 150, 160, and 170 Series)

Fax Completed Form to (800) 587-7501

Date:	/ /						, _			
Firm Nam	e:	P.O. # (if Ordering):								
		City and State								
Project Na	ame:									
Total Quantity: Door Mark:										
Deadbolt	Housing:	☐ DB130	Bolt into He	eader Only	E	exterior	$A \square B \square$	С	D E	
		☐ DB131	Bolt into Flo	oor Only	H	Handle	$F \square G \square$	Н□	J □ J-S □	
		☐ DB132	Bolt into He	eader and Flo	or		K□K-S□	L 🗆 L-	$S \square M \square$	
		☐ DB140	☐ DB150				N	И-Ѕ□	$N \square P \square$	
		☐ DB160	☐ DB170					Χ□	Y Z Z	
Dummy H	ousing:	☐ DH130	☐ DH140	☐ DH15	50				(None)	
		☐ DH160	☐ DH170				Door	Swing Di	agram	
Pair(s): _		Swing:	Single(s	:):				Interior		
Keying:	\square Cylinde	er Both Sides		Keyed Alike			6 5		2 1	
		er Out / Thum		Other (Spec	ify):			4 3		
		Turn Both Si	des					Exterior		
_	L INFORM									
Jamb Co		Sidelites								
		☐ Wall (Pivo				2")				
Header Si (DB130, DB1		O ONLV)	Recommend	ed Width is 6	6"					
Electric S			Folger A	dam 310-1 w	u/ 3///" Strai	iaht Kaai	nar			
LIGULIU O	liikg.			Signal Switc						
(DB130, DB1	60, or DB170		vvitilout	olyllai owitc	II <u>I UIIIISIIGU</u>	a by O.II	<u>. Laurence</u>			
Sill Condi	ition:	☐ Floor N	Mounted Ram	np Strike						
		☐ Thresh	old Ramp St	rike (Minimu	m is 1/2" X	7")				
-		r DB150 ONLY)								
Rail Desc	=	☐ Clad	∐ Non-	-Clad S	Size or Num	ıber:				
Door Type) :						Stile			
Check One		A	BP	P	F		L Medium	Metal or		
								Wood		
							Wide	<u></u> " Thick		
Glass Thickness: ☐ 1/2" (12 mm) ☐ 3/4" (19 mm)										
Actual Door Size: Horizontal Centers: (CRL Will Calculate)										
Crash Bar	Height A	bove Bottom	of Door: \Box	42"		☐ Othe	er (Specify): _			
Finish:	☐ Stair	nless Steel:		#4 Satin Br	ushed	☐ #8 F	Polished			
	☐ Bras	s:		#4 Satin		□ #8 F	Polished			
	☐ Cust	om (Specify):				_				


Please Contact CRL Technical Sales for specification details on ordering these new handles for All Glass Entrance Doors. **Toll Free Phone** (800) 421-6144 U.S. or (877) 421-6144 Canada, Extension 7700 **Toll Free Fax** (800) 587-7501 or E-mail **techsales@crlaurence.com**

CRL INTERIOR DOOR HANDLES


CRL Deadbolt Handle

- For 1/2" (12 mm) or 3/4" (19 mm) Tempered Glass
- Can Be Used as Replacement for Older Deadbolts
- Custom Sizes of Stock Finishes
 Ship Within Three Business Days
- Optional Keyed Access
- Optional Magnetic Locks
- Optional Exterior Fixed Handles
- Available in Polished or Brushed Stainless Steel, Polished or Satin Brass, and Oil Rubbed Brass*


With Locking Mechanism on Interior Side of Door




Dead Bolt DB 130 Locks at top only Dummy DH 130




Dead Bolt DB 131 Locks at bottom only




Dead Bolt DB 132 Locks at top and bottom




Dead Bolt DB 140 Dummy DH 140



Dead Bolt DB 150 Dummy DH 150




Dead Bolt DB 160 Dummy DH 160



Dead Bolt DB 170 Dummy DH 170

^{*} Oil Rubbed Brass Finish has a 7-10 Day Lead Time

CRL EXTERIOR PUSH/PULL HANDLE COMBINATIONS FOR DEADBOLT HANDLES

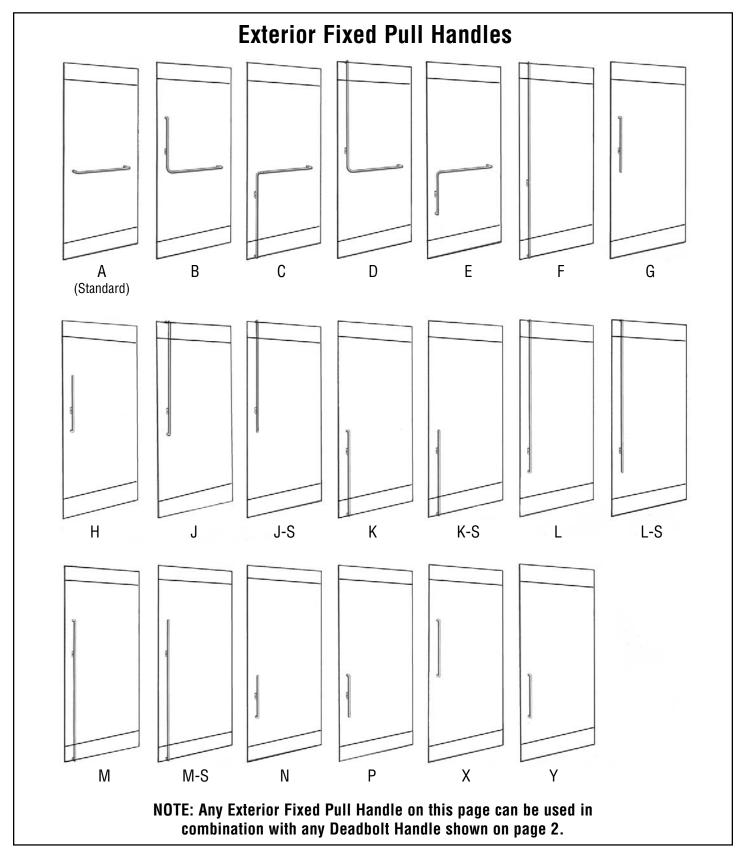

Please Contact CRL Technical Sales for specification details on ordering these new handles for All Glass Entrance Doors. **Toll Free Phone** (800) 421-6144 U.S. or (877) 421-6144 Canada, Extension 7700 **Toll Free Fax** (800) 587-7501 or E-mail **techsales@crlaurence.com**

HANDLE NUMBER BREAKDOWN

PA	Base Handle Type-	Panic Deadbolt- Dummy Handle Electric Egress					
100	Interior Handle Type-	100 110 130- 131- 132- 140- 150- 160- 170-	DB or DH ONLY DB ONLY DB ONLY DB or DH ONLY DB or DH ONLY DB or DH ONLY DB or DH ONLY	Bolts to header only Bolts to floor only Bolts to header and floor			
A	Exterior Pull-	See attached sheet					
3	Swing-	PA Handles- EG Handles- DB Handles- RHR (3), LHR (4) ONLY RDH (1), LHD (2), RHR (3), LHR (4) ONLY RDH (1), LHD (2), RHR (3), LHR (4), RH (5), LH (6)					
R	Mounting Option-	Rail- Glass- Aluminum Stile	R G e- A				
K	Keying Options-		K P K 1 2 an option for DB is omitted for DH ha	PA,EG PA,EG DB only DB only DB only			
BS	Finish-	BS- PS- PB- SB- ORB-	Brushed Stainless Stainless Stainless Stain (Brushed) Brass Oil Rubbed Brass	teel US32D US32NL			

CRL SUGGESTED GUIDELINES

CRL Recommends that Door Height be Limited to:

1/2" (12 mm) Glass:

Interior Openings: 8'-6" (2.59 m)

Exterior Openings: 8'-0" (2.44 m)

3/4" (19 mm) Glass:

Exterior Openings: 8'-6" (2.59 m) Interior Openings: 9'-0" (2.74 m)

NOTE:

If doors exceeding these recommendations are required, the designer should take into account the following factors:

- Volume of Daily Usage (Number of Anticipated Cycles)
- Deflection of Door Due to Wind and/or Stack Load Pressures
- Stability of Door Under Operation (How Much the Door Flexes When Pushed)


For assistance in design applications, please contact CRL Technical Sales.

CRL Storefronts Online Design and Glass Size Program

- An Innovative Web-Based Program that Generates Glass Sizes from Measurements You Take in the Field
- Access 24/7 at www.crlaurence.com
- Frameless Storefront Designs Have Never Been So Easy
- Simply Push the Print Icon Upon Completion of Data Entry to Generate Complete Glass Sizes
- Built-In Safety Features Ensure CRL Approves of Design and Specifications







Please Contact CRL Technical Sales for specification details on ordering these new handles for All Glass Entrance Doors. **Toll Free Phone** (800) 421-6144 U.S. or (877) 421-6144 Canada, Extension 7700 **Toll Free Fax** (800) 587-7501 or E-mail **techsales@crlaurence.com**